


放电终止电压 = 1.80 V/cell						恒电流放电 单位 : A								
Model	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h
GUN12-40F	101	60.0	39.2	28.8	23.7	13.7	10.8	8.4	7.3	6.2	4.9	4.0	3.4	2.1
GUN12-55F	139	83	53.9	39.6	32.6	18.8	14.9	11.6	10.0	8.6	6.7	5.5	4.7	2.9
GUN12-90F	227	135	88.2	64.8	53.3	30.8	24.3	18.9	16.4	14.0	11.0	9.0	7.7	4.8
GUN12-100F	252	150	98	72.0	59.2	34.2	27.0	21.0	18.2	15.6	12.2	10.0	8.6	5.3
GUN12-120F	300	180	118	87.4	70.8	40.9	32.2	25.2	21.8	18.8	14.7	12.1	10.2	6.4
GUN12-150F	376	226	148	109	88	51.1	40.2	31.4	27.2	23.5	18.4	15.1	12.8	8.0
GUN12-180F	451	271	177	131	106	61.3	48.2	37.7	32.7	28.2	22.0	18.1	15.3	9.6
GUN12-200F	501	301	197	146	118	68.2	53.6	41.9	36.3	31.4	24.5	20.2	17.0	10.7

放电终止电压 = 1.75 V/cell						恒电流放电 单位 : A								
Model	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h
GUN12-40F	112	64.8	40.8	30.4	24.3	13.8	10.8	8.5	7.4	6.4	5.0	4.1	3.4	2.2
GUN12-55F	154	89.1	56.1	41.8	33.4	18.9	14.9	11.7	10.2	8.8	6.8	5.6	4.7	3.0
GUN12-90F	252	146	91.8	68.4	54.7	31.0	24.3	19.1	16.7	14.4	11.2	9.2	7.8	4.8
GUN12-100F	280	162	102	76.0	60.8	34.4	27.0	21.2	18.6	16.0	12.4	10.2	8.6	5.4
GUN12-120F	335	194	123	90.2	72.7	41.3	32.4	25.2	22.4	19.2	14.8	12.2	10.3	6.5
GUN12-150F	419	242	154	113	90.8	51.6	40.4	31.4	28.0	24.0	18.5	15.2	12.9	8.1
GUN12-180F	503	291	184	135	109	61.9	48.5	37.7	33.6	28.8	22.2	18.3	15.5	9.7
GUN12-200F	558	323	205	150	121	68.8	53.9	41.9	37.3	32.0	24.6	20.3	17.2	10.8

放电终止电压 = 1.70 V/cell						恒电流放电 单位 : A								
Model	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h
GUN12-40F	122	66.4	41.6	30.4	24.6	14.2	11.0	8.6	7.5	6.5	5.0	4.1	3.5	2.2
GUN12-55F	167	91.3	57.2	41.8	33.9	19.5	15.1	11.8	10.3	8.9	6.8	5.6	4.8	3.0
GUN12-90F	274	149	93.6	68.4	55.4	31.9	24.7	19.3	16.9	14.6	11.2	9.2	7.9	4.9
GUN12-100F	304	166	104	76.0	61.6	35.4	27.4	21.4	18.8	16.2	12.4	10.2	8.8	5.5
GUN12-120F	365	200	124	91.2	73.7	42.3	32.7	25.4	22.7	19.4	15.0	12.3	10.5	6.6
GUN12-150F	456	250	155	114	92	52.9	40.9	31.8	28.3	24.2	18.7	15.4	13.1	8.2
GUN12-180F	547	300	186	137	111	63.5	49.1	38.2	34.0	29.1	22.5	18.4	15.8	9.9
GUN12-200F	608	333	206	152	123	70.6	54.6	42.4	37.8	32.3	25.0	20.5	17.5	11.0

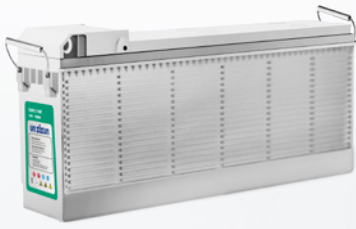

放电终止电压 = 1.80 V/cell						恒功率放电 单位 : W/cell								
Model	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h
GUN12-40F	183	113	74.4	56.0	45.8	26.6	20.7	16.3	14.2	12.3	9.6	7.8	6.7	4.3
GUN12-55F	252	155	102	77.0	63.0	36.6	28.5	22.4	19.5	16.9	13.2	10.8	9.2	5.9
GUN12-90F	412	254	167	126	103.1	59.9	46.6	36.7	31.9	27.7	21.6	17.6	15.0	9.7
GUN12-100F	458	282	186	140	115	66.6	51.8	40.8	35.4	30.8	24.0	19.6	16.7	10.7
GUN12-120F	547	337	223	168	137	79.7	62.2	49.0	42.5	36.9	28.6	23.5	19.9	12.9
GUN12-150F	684	421	278	210	171	100	77.8	61.2	53.2	46.1	35.8	29.4	24.9	16.1
GUN12-180F	821	505	334	252	205	120	93.3	73.4	63.8	55.3	42.9	35.3	29.9	19.4
GUN12-200F	912	562	371	280	228	133	104	81.6	70.9	61.4	47.7	39.2	33.2	21.5

放电终止电压 = 1.75V/cell						恒功率放电 单位 : W/cell								
Model	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h
GUN12-40F	196	119	76.0	57.6	46.0	26.7	20.8	16.4	14.5	12.4	9.6	7.9	6.7	4.3
GUN12-55F	270	164	104.5	79.2	63.3	36.7	29	22.6	19.9	17.1	13.2	10.9	9.2	5.9
GUN12-90F	441	268	171	130	104	60.1	46.8	36.9	32.6	27.9	21.6	17.8	15.0	9.7
GUN12-100F	490	298	190	144	115	66.8	52.0	41.0	36.2	31.0	24.0	19.8	16.7	10.7
GUN12-120F	587	357	228	172	137	79.9	62.4	49.1	43.5	37.2	28.6	23.6	20.0	12.8
GUN12-150F	733	446	284	215	171	100	78.0	61.3	54.4	46.6	35.8	29.5	25.1	16.0
GUN12-180F	880	536	341	258	205	120	93.6	73.6	65.2	55.9	42.9	35.4	30.1	19.2
GUN12-200F	978	595	379	286	228	133	104	81.8	72.5	62.1	47.7	39.4	33.4	21.4

放电终止电压 = 1.70V/cell						恒功率放电 单位 : W/cell								
Model	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h
GUN12-40F	210	120	76.8	57.6	46.6	26.8	21.0	16.4	14.6	12.5	9.7	7.9	6.8	4.4
GUN12-55F	288	165	105.6	79.2	64.1	36.9	28.8	22.6	20.0	17.2	13.3	10.9	9.4	6.0
GUN12-90F	472	270	173	130	104.9	60.3	47.2	36.9	32.8	28.1	21.8	17.8	15.3	9.9
GUN12-100F	524	300	192	144	117	67.0	52.4	41.0	36.4	31.2	24.2	19.8	17.1	11.0
GUN12-120F	628	360	228	173	140	80.4	63.0	49.2	43.8	37.3	28.9	23.7	20.4	13.1
GUN12-150F	785	450	286	216	175	100	78.7	61.4	54.7	46.7	36.1	29.6	25.6	16.3
GUN12-180F	942	540	343	259	210	121	94.5	73.7	65.7	56.0	43.3	35.6	30.7	19.6
GUN12-200F	1046	600	381	288	233	134	105.0	81.9	73.0	62.2	48.2	39.5	34.1	21.8